



Signal Monitoring  
Audio Processing  
RDS Encoding  
Radio All in One  
Mobile Metering  
Test & Measurement



## SCRIPTEASY EASYLINK REMOTE CONNECTION SOFTWARE

### OVERVIEW

SCRIPTEASY EasyLink is a complete, ready-to-use, control solution for remotely-located equipment. On one side, a WorldCast Systems unit is linked to the remote equipment via a simple cable connection and a driver enables communication between the two using the remote equipment's native protocol (serial, SNMP, ModBus...). On the other side, an intuitive and user-friendly interface gives access to readings and control functions.


SCRIPTEASY EasyLink dramatically reduces installation time and hassle, while at the same time increasing the number of data and control points that can be made remotely accessible! With SCRIPTEASY EasyLink hundreds of readings, status indications, control functions and adjustments are available for the overall facility control plan.

### FEATURES

- Pre written interface, no programming needed
- Multiple MasterView views included
- Load only the EasyLink script, or merge with an existing script using traditional I/O
- Connect a transmitter or other broadcast equipment supported by EasyLink
- Access hundreds of data and control points (depending on monitored equipment)

### BENEFITS

- Access measurements and control functions with only a single cable connection between the facility control device and the external equipment
- Save hours of planning and installation time
- Provides a 'plug-and-play' solution
- Access measurements that cannot be obtained with traditional I/O wiring connections
- Save the traditional I/O connections for other equipment
- Views can be customized to fit your needs
- Easily duplicated from site to site

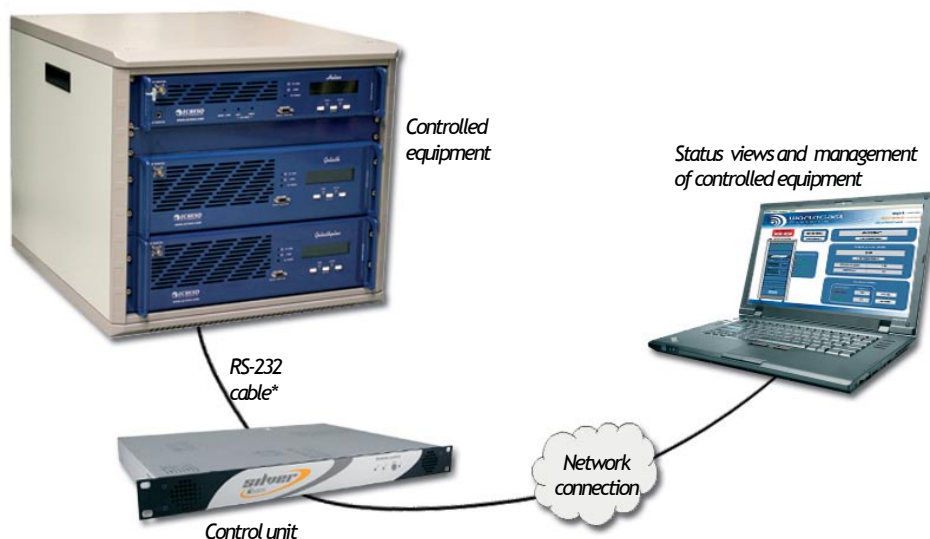

With a simple RS-232 connection\*, hundreds of parameters that could not be accessed by traditional I/O connections become available over a network. The MasterView software application provides an intuitive and user-friendly interface.

### APPLICATIONS

SCRIPTEASY EasyLink is the ideal tool for:

- Broadcasters who need to manage equipment without network communication capabilities - as long as they have an RS-232 port\*
- Broadcasters who are looking for advanced remote facility control without spending hours wiring and programming

# SCRIPT EASY EASYLINK REMOTE CONNECTION SOFTWARE

As an example for Z-series Harris transmitters, detailed current and temperature measurements are available for each of the amplifier modules on each Z plane, plus readings on each individual combiner, IPA and power supply.

For Ecreso transmitters, a general view plus a view per module (exciter + amplifiers) displays forward and reflected power, current, voltage, temperature, alarm status and much more.

Note that all MasterView views can be customized to your specifications, and all readings and controls can be integrated in the views with other data from a different EasyLink or traditional I/O connections.



Harris Z view



NEXT FM view



Ecreso 500 W Helios exciter view

\* Most EasyLink applications are available with an RS-232 connection. Depending on supported equipment some are available with an RS-485/ModBus or IP connection.

## SUPPORTED EQUIPMENT

### WorldCast Systems units that support SCRIPT EASY EasyLink \*

Facility Management	Relio IP2CHOICE Remote Control Silver Mini Control Silver
Monitoring	GOLDENEAGLE: AM, ATSC, DVB-T/H, FM, HD, TV FM Monitoring Silver
Radio All In One	Digiplexer 2/4 Digiplexer 246 NEXT FM

### Ecreso transmitters supported

500 W / 1 kW Next FM with Goliath amplifier(s)  
500 W / 1 kW / 2 kW / 3 kW FM Helios with Goliath amplifier(s)  
250 W HD Goliath amplifier

### Harris transmitters supported

Z4s, Z2, Z3\_5, Z2R, Z5, Z6HDs, Z7\_5, Z8HDs, Z4HDs\_R, Z10, Z12HDs, Z16HDs, Z4HDc, Z6HDc, Z8HDc, Z4HDc\_R, Z12HDc, Z16HDc, Z4HD+\_R, Z6HD+, Z8HD+, Z12HD+, Z16HD+

### Nautel transmitters supported

V Series for 3.5, 5, 7.5 and 10 kW FM transmitters

### Wegener Receivers supported

Unity 4600

### Schneider equipment supported

Power meter: PM-170  
Automation managers: iRio, Flowtel

### Other supported equipment

On demand

\* All WorldCast System devices that support ScriptEasy v.2.3.7 or higher

## ORDER INFORMATION

### Standard versions

Please contact the Audemat Sales Department for the complete price-list



contact@audemat.com - www.audemat.com

### Head office:

20, avenue Neil Armstrong -33700 -Mérignac-France  
Tel: +33 (0)557 928 928  
Fax: +33 (0)557 928 929

To contact our worldwide offices, please visit our website

Ref: ScriptEasy-EasyLink- Datasheet 10/2010  
Technical specifications are subject to change without prior notice